Cleanroom Systems

INNOVATE.DESIGN.MANUFACTURE





Cleanroom Systems

INNOVATE DESIGN MANUFACTURE

With over 25+ years in custom cleanroom design and manufacturing for some of the biggest names in the biopharmaceutical, semiconductor and medical device companies in the world, BasX Solutions has the experience you can count on to deliver costeffective solutions that are energy efficient and maximize cleanroom effectiveness.

BasX Solutions offers a wide range of custom designed solutions that meet your requirements for cleanroom environment specifications, from Grade A and B to Class 1 to 100,000.

- Make Up Air Handlers
- Recirculation Air Handlers
- Fan Filter Units
- Fan Powered Plenums
- Plenum Modules
- Flush Grid with Integral Lighting







Make Up Air and Recirculation Air Handler Construction Features

- Indoor or outdoor cabinet construction
- Modular construction
- All welded, heavy-duty structural channel iron frame with lifting brackets
- Steel, aluminum or stainless steel cabinet
- Smooth interior or exterior
- Anti-microbial/anti-corrosive construction
- Foam panel, hybrid foam panel and fiberglass insulation
- Anti-skid and diamond-plate floors
- Powder coat finish to your specification for all cabinets, roof, base, and interior partitions and doors
- Thermal break technology
- Standard and severe duty components
- Optional fan types, styles, and discharge arrangements
- Variable Frequency Drives (VFDs)
- Energy recovery ventilation: wheels, plate, and heat pipe technology
- Chilled water, DX and direct or indirect evaporative cooling options
- Hot water, steam, direct or indirect gas, and electric resistance heating options
- Pre-filters, high efficiency, HEPA/ULPA, odor control media filter options
- Air monitoring devices

Air Handler Units

INNOVATE.DESIGN.MANUFACTURE

Whether your needs cover semiconductor or Life Sciences mission critical applications, BasX Make Up Air Handlers, Recirculation Units and Fan Filter Units are custom designed and manufactured to withstand the harsh chemicals in your demanding environments.

- UV lights
- Service vestibules
- Dampers, louvers, and hoods
- Air blenders
- Humidifiers



Fan Filter Units are typically used in place of conventional recirculating air units due to height restrictions and are often installed in a ceiling grid system or suspended from a support structure. Recirculated air is purified through a prefilter installed on the top and blown through a HEPA or ULPA filter into a cleanroom.




Fan Powered Plenums

INNOVATE.DESIGN.MANUFACTURE

Fan Powered Plenums are an ideal solution for cleanspace areas that have confined ceiling spaces or have no available ducting to a remote fan or air handler.

- Provides Great Redundancy in the System
- Available with Complete Control System. Control from a PC with Interface to Building Management System
- Available with Handheld Controller to Individually Set and Control Fan/Motor Speed
- Fan Commander 200 -Control Up to 200 Fan/Motor Assemblies



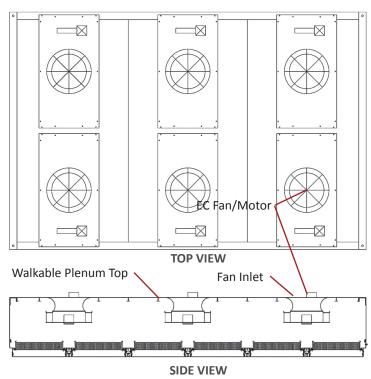








- Provides Direct Support for Recirculation Air Handlers
- Plenum Module Eliminates the Need for Field Built Plenums
- Shared Air Openings to Adjacent Plenums
- Plenum Modules are Suspended from Structure or Custom Floor Mounted Support Structure can be Provided
- Plenum Modules are Available in Sizes Up To 8' x 24'

Plenum Modules

INNOVATE.DESIGN.MANUFACTURE

Plenum modules eliminate the need for field built ducts and duct collars while reducing overall pressure drop. Plenum modules have the same benefits as flush ceiling grid, including integrated lighting and fire protection, as well as excellent performance.

Able to withstand high point loads with minimum deflection, BasX plenums are able to support recirculation air handlers, live loads and other accessories. Maintenance access to fan modules is made easy via walkable top skins. Multiple plenums may be tied into one fan module when side wall openings are used.



FLush HEPA Grid with Integral Lighting

INNOVATE.DESIGN.MANUFACTURE

BasX Flush Grid Ceiling
System with Integral Lighting
provides excellent flexibility in
cleanroom design solutions.
Wall location isn't determined
by tear-drop lights, they can go
anywhere, below lights, filters,
and grid.

Each module is fabricated at the factory, complete with fire protection and lights. Installation time, manpower, and cost are reduced compared to a traditional stickbuilt system.

Available as top load, bottom load, stainless steel or aluminum.




- TOP LOAD FLUSH
 HEPA CEILING GRID
- BOTTOM LOAD
 FLUSH HEPA CEILING
 GRID
- 304 & 316 BOTTOM LOAD FLUSH HEPA CEILING GRID



FLush HEPA Grid with Integral Lighting


INNOVATE.DESIGN.MANUFACTURE

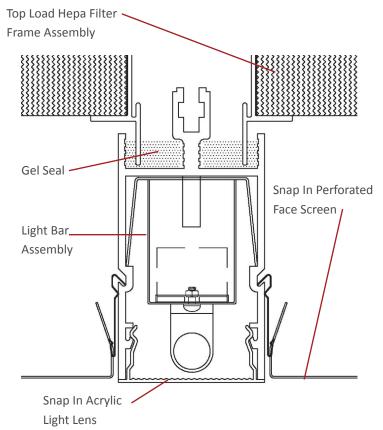

Section View at Interior Grid with Light Bar Assembly

EXTRUDED ALUMINUM TOP LOAD FLUSH CEILING GRID SYSTEM

- 2-1/2" Flush Hepa Grid System with Integral Light Assembly
- Top Load with Gel in Grid Frame Integral Sprinkler Connections
- Bottom Snap in Flush Face
 Screen that Aerodynamically
 Evens the Airflow Under the Grid
- Grid is a proven product with over 1 million Sq. Ft. installed
- Head Track Connections Available

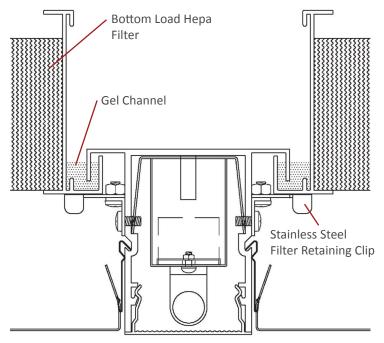

Section View at Interior Grid with Light Bar Assembly

EXTRUDED ALUMINUM BOTTOM LOAD FLUSH CEILING GRID SYSTEM

- 2 1/2" Flush Bottom Load Grid System With Integral Light Assembly
- Welded Grid Modules
 Manufactured In Sizes Up to 8' x 24'
- Pre-punched Bolt Holes for Grid to Grid Attachment



FLush HEPA Grid with Integral Lighting

INNOVATE.DESIGN.MANUFACTURE

LED LIGHTS

- INTEGRAL TO FLUSH GRID
- FNFRGY FFFICIENT
- NO DEADSPOTS –CONTINUOUS LIGHT
- LIGHTS AND DRIVERS HAVE A LONGER LIFE
- LIGHT LEVEL EQUIVALENT TO T-5
- NO FLUORESCENT LIGHT TUBES –
 NO BREAKAGE



T-5 LIGHTS

- INTEGRAL TO FLUSH GRID
- INDIVIDUAL FLUORESCENT TUBES HAVE DARK AREAS BETWEEN LIGHT TUBES
- FLUORESCENT TUBES CAN BREAK IN CHANGEOUT
- RELAMPING REQUIRED FREQUENTLY



LED PRODUCT INFORMATION

- LED LIGHTS AND DRIVER HAVE A PARTS ONLY 5 YEAR WARRANTY
- ETL LISTED LIGHT BAR ASSEMBLY
- LIGHT BAR WITH LED LIGHTS EASILY REPLACED
- TEMPERATURE COLOR (CCT OF THE COLOR OF LIGHTS)
 - A. LED LIGHTS COME IN 2700, 3000, 3500, 4000, AND 5000 KELVIN (K)
 - B. BASX LED LIGHTS UTILIZE 3500 KELVIN LIGHTS. THIS MATCHES THE COLOR OF T-8 AND T-5 LAMPS
- VOLTAGE 120V OR 277V IS ACCEPTABLE TO THE LED DRIVER. THE LIGHT BAR ITSELF OPERATES AT 36 VOLTS.
- EMI LOW VOLTAGE CONSTANT CURRENT DESIGN ELIMINATES EMI

BasX Solutions products are manufactured in the United States and carry full parts and labor warranties. Extended warranties and/or maintenance programs are available. Contact BasX Solutions today to find out how we can assist you.